

BIRD|BUFFER® Q3

Invisible Protection...Visible Results®

Patent No. 7334745

NEW!

All-weather design-

Rain and snow resistant filter cover protects interior from the elements

Quiet-

Quiet blower and controller for much quieter operation

Insulated Compartment-

Switchable built-in heater keeps inside warm for best operation in cold weather

Removable accessory cover-

Optional all-weather protection allows easy access to the controls

Dry output-


Unique design and smaller particles for mess-free operation

Impossible to overfill-

Easy, visual fluid level and drain for preventing overfill

Continuous output!-

Heavy duty, high volume blower is always on during vapor operations

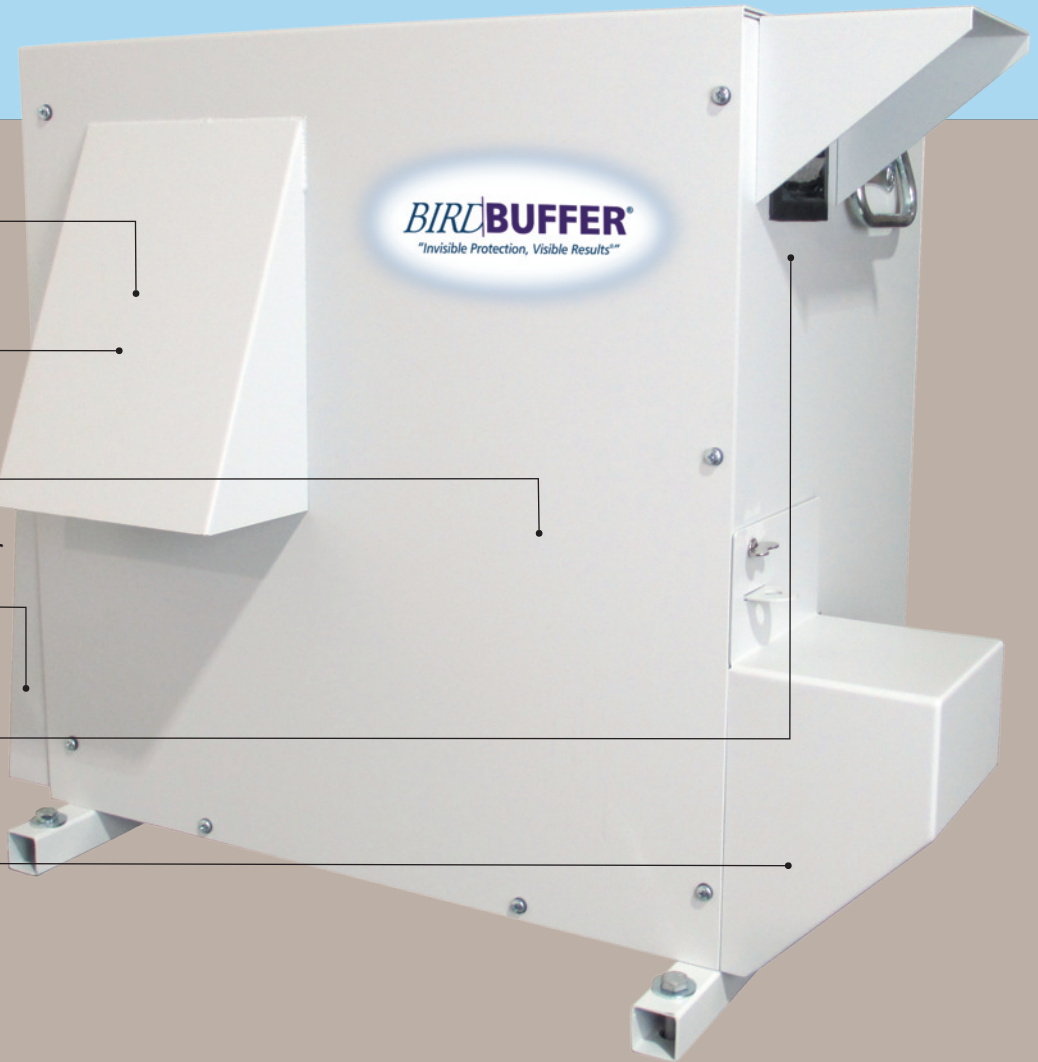

Easy thumb screw to open fill area

Lockable fill hatch


Filler cap

One gallon tank prevents overfilling

Drain plug for easy shipping or draining of old fluid



Easy clean, washable filter. Just wash or replace with new filter

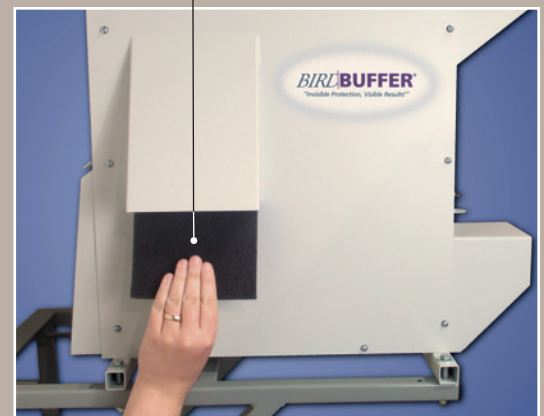

HOW IT WORKS

BirdBuffer® controls flying birds in open spaces by dispersing a safe, invisible vapor, using Rejex-It® Fog Force Fluid (Methyl Anthranilate, or MA). This vapor, which is released at 60 mph, irritates the birds' eyes and mucous membranes without risk to their health or the health of nearby people. For the BirdBuffer® to be effective, the birds must be exposed to the vapor by flying through the affected area. After several returns, the birds learn that the vapor is still in the area and find a different location for permanent roosting. The BirdBuffer® Q3 is effective on grackles, pigeons, starlings, crows, seagulls and other flying birds. Smaller birds such as sparrows respond slower and may require additional stimulation, such as a thermal fogger, to activate them to fly more.

Rejex-It® Fog Force Fluid #840000-B

Rejex-It® Fog Force has an active ingredient called methyl anthranilate, or MA. MA is listed by the United States Food and Drug Administration as a flavoring compound.



Optional accessories for the BirdBuffer® Q3

Windicator Haze #840000-B

Use Windicator® to see air movement for best positioning of your BirdBuffer® Q3



BirdBuffer Q3® on Stand #820064

Catch Tray: #820034

Floor Mat: #820057

BirdBuffer® Q3 on wall or pole bracket: #820062
Shown with magnetic heater (for below 30°): #820047



ONE YEAR LIMITED WARRANTY

BirdBuffer®, LLC guarantees to the original purchaser that this product shall be free of defects in material and workmanship, under normal use, for a period of one year from the date of purchase shown on the sales receipt. This warranty covers parts and labor providing the product is returned to BirdBuffer®, LLC in the original shipping carton and packaging. To review our complete warranty statement, go to www.birdbuffer.com. NOTE: There is a 90 day warranty on electrical components.



Toll free: 886-557-4274 • phone: 425-697-4274
Fax: 425-776-5129
Manufactured by: BirdBuffer® LLC
1420 80th St. SW, #D Everett, WA 98203 USA
www.birdbuffer.com

Built-in 24 Hour Timer

Lighted Heater Switch

- Heater must be turned on when temperatures are below 55°F

Power Cord Connection

Illuminated Power Switch

Digital LED display for ON/OFF cycles

Adjustment knobs for ON/Off Cycles

Align the four mounting holes on the removable cover to the four mounting studs on the back of the BirdBuffer® Q3 and press down to secure. Reverse process to remove the cover.



Optional accessory: removable all-weather cover protects the control panel but allows easy access for turning on and adjusting settings.

Item #820054

Specifications

The BIRDBUFFER® Q3 developed and patented by BIRDBUFFER LLC Everett, WA USA
P/N 800047 120vac P/N 800048 230vac
Double Output P/N 800057 120vac P/N 800058 230vac

Weight	73 lbs / 33.1 kg
Size	20.5" x 12.25" x 22.25" (52 cm x 31 cm x 56.5 cm)
Shipping Weight	93 lbs / 43 kg
Shipping Box Size	25" x 25" x 25" (63.5 cm x 63.5 cm x 63.5 cm)
Outlet Size	2" X 2" (5 x 5 cm)
Fluid	*Rejex-It® Fog Force Fluid (Freshness dated)
Type of Vapor	MA, Grape scent, transparent, long-lasting
Fluid Consumption	½ oz (30ml) per ½ hour or 1 qt (0.95 liter) per 32 hours
Output speed	60mph (96kph) velocity
Warm Up Time	None; with heater 3 mins.
Operating Temp.	35° - 104°F (2° - 40°C)
Continuous Vapor	Can run continuously; use with cycle timer & 24 hr. timer
Digital control	Included: adjusts 0-4 min 15 sec both "on" and "off"
24 Hour Timer	Included: 15 min. "On" and "Off" settings
Fuse - 120vac	5x20mm:8A / 250vac time-lag
230vac	5x20mm 5A / 250vac time lag
Electrical Supply	120 VAC, 8 Amp, 60 Hz 230 VAC, 5 Amp, 50 hz
Accessories: Included	1 x power cords (optional) 4 x hanging cables with snap hooks
Accessories: Not included	All-weather control panel cover Floor mat for chemicals Thermostatic magnetic heater for below 35° Drip pan for catching spilled fluids Thermal fogger for smaller birds